

## 83-675 Removal and installation of amplifier


---

### Removal

---

- 1 Remove glove box (68-140).
- 2 Pull off electrical plug.
- 3 Unscrew amplifier (6) with closing cover from holder on evaporator housing.

6 Amplifier  
18 Double contact relay

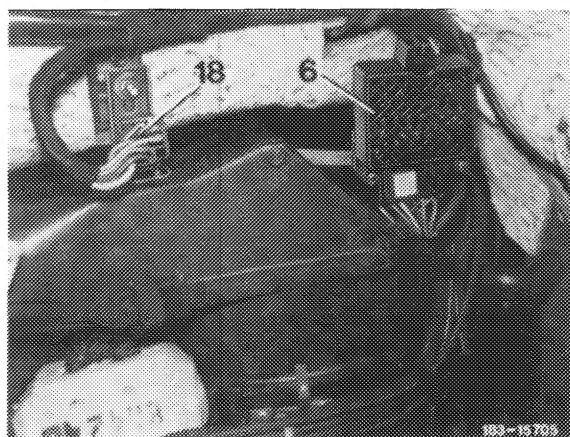

### Installation

---

- 4 Screw on new amplifier (6) together with closing cover of removed amplifier.
- 5 Mount electrical plug.
- 6 Install glove box (68-140).